

ECOUNTIT N

SINGLE/DOUBLE COIL STORAGE TANKS



> PRODUCT FEATURES

- Vertical storage tanks for DHW, with single coil (**version 1C**) or with double coil (**version 2C**), in enamelled steel.
- Glass-porcelain steel storage tank, 50mm rigid insulation and external finish of grey painted steel sheeting
- Supplied as standard with magnesium anode
- Optional 1500-2000-3000W heating element, adjustable from 15°C to 75°C
- Fitting for recirculation

DIMENSIONS (mm)						
	100-1C	150-1C	200-1C	300-1C	200-2C	300-2C
A	500	500	540	620	540	620
B	978	1325	1453	1535	1453	1535
C	870	1216	1344	1431	1344	1431
D	736	1088	1234	1261	1234	1311
E	636	988	984	1061	1134	1211
F	536	888	884	961	1034	1111
G	336	336	334	361	934	961
H	236	236	234	261	834	861
I	126	126	124	131	734	761
J	-	-	-	-	234	261
K	-	-	-	-	124	131
L	-	-	-	-	324	351
M	400	400	440	520	440	520
N	326	326	324	351	324	351


TYPE OF FITTING						
	100-1C	150-1C	200-1C	300-1C	200-2C	300-2C
DHW	3/4"	3/4"	3/4"	1"	3/4"	1"
coil/s	3/4"	3/4"	3/4"	1"	3/4"	3/4"
recirculation	3/4"	3/4"	3/4"	1"	3/4"	3/4"




> KEY

- Hot water outlet
- Boiler inlet
- Probe
- Recirculation
- Probe
- Boiler outlet
- Cold water inlet
- Probe
- Solar inlet
- Solar outlet

ECOUNTIT VERSION 1C

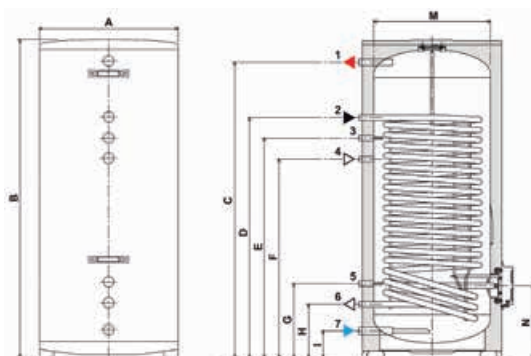

ECOUNTIT VERSION 2C

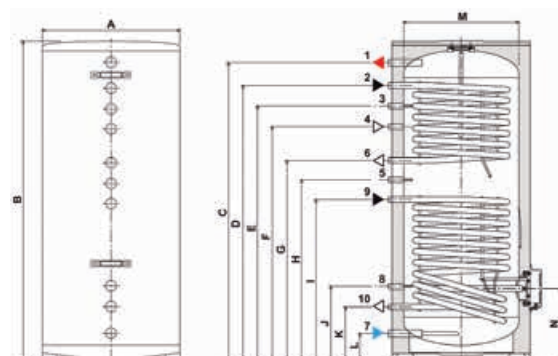

MODEL		SINGLE COIL				DOUBLE COIL	
		100-1C	150-1C	200-1C	300-1C	200-2C	300-2C
Capacity	l	89	129	173	261	174	262
Exchange surface (upp/low)	m ²	0.74	1.25	1.4	1.83	0.5/0.83	0.72/1
Power (Δt 35°C - upp/low)	KW	18.5	31.25	35	45.75	12.5/20.75	18/25
Pressure drops (upp/low)	mbar	228	386	432	565	155/254	220/308
Max operating temperature	°C	95	95	95	95	95	95
Primary flow rate	m ³ /h	2	2	2	2	2	2
Max operating pressure	bar	8	8	8	8	8	8
Empty weight	kg	46	63	74	101	73	102
CODE		GRY0780A	GRY0980A	GRY0BZ0A	GRY0W00A	GRY0YZ0A	GRY0Z00A
HEATING ELEMENT CODE	1500W	90903530		90903531		90903531	
	2000W	90903540		90903541		90903541	
	3000W	90903550		90903551		90903551	