

DOUBLE PLUS SVT N DUAL-BODY WATER SOFTENERS WITH SMART ELECTRONICS FOR WATER AND SALT SAVINGS




- Softener with combined volume/time regeneration
- Automatic control valve, complete with volumetric meter
- Heavy-duty valve for high-flow management (models 250, 300). Ensures service quality even during peak flow periods
- Separate polyethylene salt tank of small dimensions, facilitating installation in boiler rooms
- New and advanced electronic management guarantees complete control of regeneration phases while maintaining low energy, water, and salt consumption
- Display of treated water volume
- The softener can be used for domestic and technological purposes
- Models in the "Plus" range are not pre-loaded
- Model DOUBLE PLUS SVT N 175 is supplied with remote by-pass

Note: Install a filter at the inlet to retain suspended particles (see Water Filters section)

SMART TECHNOLOGY - HIGH ENVIRONMENTAL SUSTAINABILITY

WATER SAVING – SALT SAVING – IMPROVED WATER QUALITY

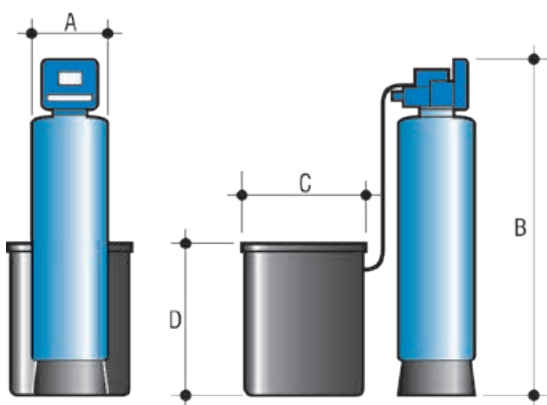

REASONS TO CHOOSE IT:

- Salt absence indication
- High outlet water quality after regeneration
- Regeneration and discharge water quality control through conductivity parameter monitoring
- Innovative quick brine preparation system
- Salt consumption reduction over 30%
- Ready for home automation management

MODEL		DOUBLE PLUS SVT N 175	DOUBLE PLUS SVT N 250
Operating pressure min/max	bar	1.4 - 6	1.4 - 6
Power supply	V/Hz	230/50	230/50
Standard salt consumption per regeneration	kg	< 15.75	< 26.25
Salt consumption per regeneration*	kg	22.5	37.5
Salt tank	kg	300	500
A	mm	539	610
B	mm	2129	2407
C	mm	710	1160
D	mm	1060	1350
Inlet/outlet connections	-	1" 1/2	2"
Weight	kg	246	387
Resin volume (liters)	lt	175	225
Maximum cycle capacity	m ³ °f	962	1375
Minimum flow rate	l/h	9000	13000
Maximum flow rate	l/h	15000	18000
Power absorption	W	8	8
CODE		OYADIMXO	OYADKMXO

* The indicated salt consumption does not include the positive reduction effect due to the electronic system. Consumption values are calculated considering inlet water at 30°F. Data may vary depending on inlet water quality and daily consumption.

** The indicated salt consumption includes the positive reduction effect due to electronics, average consumption, and discharge conductivity parameter control.