




- Die-cast aluminium radiator with flat surface
- It is the ideal smart solution which fits perfectly with any style of furniture, thanks to its sober and elegant design
- 6 bar as maximum operating pressure
- Blocks are assembled in factory in units from 2 to 12 sections
- Each section is painted individually through epoxy powder coating: this results in a brilliant surface, resistant to heat throughout the years
- Sections are assembled each other in the factory via an inorganic elastic joint, with unbeatable resistance to high temperature and pressures, dilatations, circuit additives, chemical gaseous reactions in the heating system. This results in the maximum watertightness of the radiator itself.

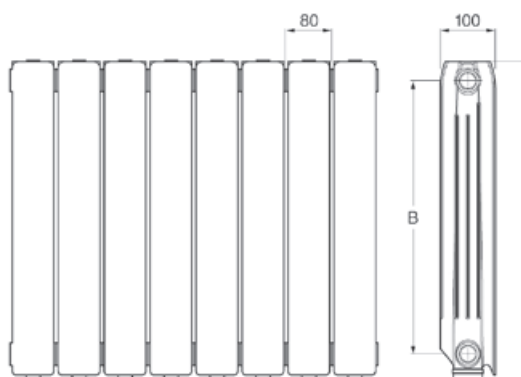

MODEL			450 C	600 C	700 C	800 C
Thermal emission EN 442	Δt 50°C	W	89.2	119.8	137.1	158.0
	Δt 60°C	W	112.7	152.3	174.3	200.9
Exponent index n			1.27784	1.31869	1.31598	1.32052
Constant Km			0.601947	0.688627	0.796525	0.901564
Water content		Liters	0.31	0.39	0.45	0.50
Dimensions	Total height (A)	mm	431	581	681	781
	Tapping center (B)	mm	350	500	600	700
Connections	Diameter	inches	1"	1"	1"	1"

> ACCESSORIES ON REQUEST

CODE	DESCRIPTION
ZE19993000	1" RH-LH NIPPLE
ZE19993010	1" GASKET